




7808DJ / 7806DJ / 7906DJ

DISMANTLING JOINT

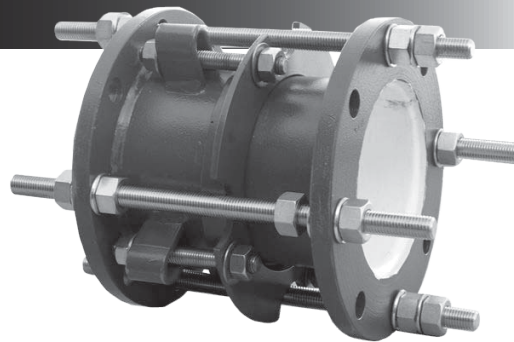

APPLICATIONS:

ROBAR **7808DJ**, **7806DJ** or **7906DJ** Dismantling Joint allows for adjustability once the flange and other flange fitting is in place. Dismantling Joints provide Longitudinal adjustment which allows for future modifications and adjustments. The dismantling joint provides an easier way of repairing or doing maintenance on the flanged pipe system.

SIZES AVAILABLE:

4" to 96" Nominal Pipe OD. Contact Robar for larger sizes.

MATERIAL SPECIFICATIONS:

Flange Spool: AWWA C207 Class D Flange 150 lb Bolt Pattern (other flanges available)
 End Ring & Body: Body and End Ring are carbon steel ASTM A36
 Gaskets: SBR (Buna S) Rubber (other compounds available)
 Fasteners: 7808DJ - High Strength Low Alloy Fasteners
 7906DJ - Type T-316 Stainless Steel
 Tie Rods: ASTM A193 Gr B7 per M11 (stainless steel is available)
 Coating: 7808DJ - Two coats of enamel
 7906DJ - Fusion Bonded Epoxy
 (other types of epoxy available)

HOW TO ORDER:

Determine the product number (**7808DJ**, **7806DJ** or **7906DJ**), nominal size, actual OD of pipe, and pressure rating and then use the appropriate order code as shown in the following example:

To connect 16.00" OD steel pipe with 16" Flanges, that is epoxy coated and stainless steel bolts, the ordering code is

7906DJ - 16" x 16.00"
 product OD (Actual) OD (Actual)
 number

i.e. **7906 - 16 x 16.00" OD**

ROBAR INDUSTRIES LTD. - BRITISH COLUMBIA

Phone: (604) 591 - 8811
 Toll Free: (800) 663 - 6553
 Fax: (604) 591 - 5288

LES PRODUITS INDUSTRIELS ROBAR INC. - QUEBEC

Phone: (450) 641 - 9525
 Toll Free: (800) 315 - 9525
 Fax: (450) 641 - 4894

Website: www.robarindustries.com / E-mail: waterworks@robarindustries.com